


Stock Brush with Black Nylon Filament

STOCK BRUSH
GUIDE (INCHES)

IWSBHE.0909

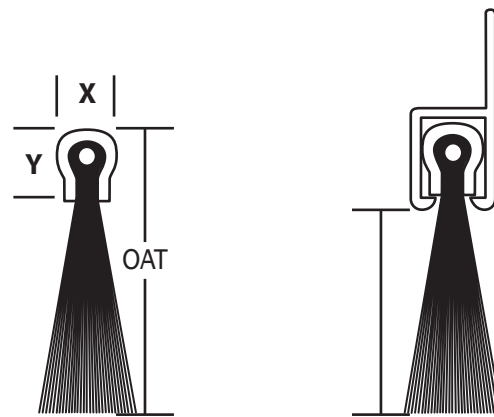

Overall Trim (OAT)

Exposed Length

All measurements in inches.

Section	Product Code	CHANNEL DIMENSIONS		Overall Trim in.	Exposed Length in.	Stock Filament in.	Other Available Filament Diameters in.
		X	Y				
A	SFA102BL	0.095	0.110	0.37	0.22	0.006	0.004 to 0.010
	SFA104BL	0.095	0.110	0.56	0.41	0.006	0.004 to 0.010
	SFA108BL	0.095	0.110	0.90	0.75	0.006	0.004 to 0.010
	SFA110BL	0.095	0.110	1.15	1.00	0.006	0.004 to 0.010
B	SFB105BL	0.150	0.152	0.75	0.54	0.006	0.004 to 0.012
	SFB110BL	0.150	0.152	1.22	1.01	0.006	0.004 to 0.012
C	SFC106BL	0.180	0.199	0.87	0.62	0.006	0.004 to 0.016
	SFC110BL	0.180	0.199	1.28	1.03	0.006	0.004 to 0.018
D	SFD109BL	0.240	0.256	1.25	0.93	0.008	0.006 to 0.020
	SFD112BL	0.240	0.256	1.50	1.18	0.008	0.006 to 0.020
	SFD116BL	0.240	0.256	1.92	1.60	0.012	0.008 to 0.020
	SFD120BL	0.240	0.256	2.31	1.99	0.012	0.008 to 0.020
F	SFD130BL	0.240	0.256	3.31	2.99	0.012	0.008 to 0.020
	SFF115BL	0.313	0.313	1.88	1.50	0.016	0.008 to 0.060
	SFF120BL	0.313	0.313	2.38	2.00	0.016	0.008 to 0.060
	SFF125BL	0.313	0.313	2.88	2.50	0.016	0.008 to 0.060
	SFF130BL	0.313	0.313	3.38	3.00	0.020	0.008 to 0.060
G	SFF140BL	0.313	0.313	4.38	4.00	0.020	0.012 to 0.020
	SFF150BL	0.313	0.313	5.38	5.00	0.020	0.012 to 0.020
	SFG118BL	0.350	0.370	2.25	1.82	0.012	0.008 to 0.060
	SFG118BL	0.350	0.370	2.25	1.82	0.035	0.008 to 0.060
	SFG125BL	0.350	0.370	3.00	2.57	0.012	0.008 to 0.060
	SFG125BL	0.350	0.370	3.00	2.57	0.035	0.008 to 0.060
	SFG130BL	0.350	0.370	3.50	3.07	0.020	0.012 to 0.060
	SFG130BL	0.350	0.370	3.50	3.07	0.035	0.012 to 0.060
	SFG140BL	0.350	0.370	4.50	4.07	0.020	0.012 to 0.060
	SFG140BL	0.350	0.370	4.50	4.07	0.035	0.012 to 0.060
	SFG150BL	0.350	0.370	5.50	5.07	0.020	0.020 to 0.060
K	SFG150BL	0.350	0.370	5.50	5.07	0.035	0.020 to 0.060
	SFG160BL	0.350	0.370	6.50	6.07	0.035	0.020 to 0.060
	SFG170BL	0.350	0.370	7.50	7.07	0.035	0.020 to 0.060
	SFK130BL	0.500	0.500	3.58	3.00	0.045	0.010 to 0.060
	SFK140BL	0.500	0.500	4.58	4.00	0.045	0.010 to 0.060
	SFK150BL	0.500	0.500	5.58	5.00	0.045	0.010 to 0.060
	SFK160BL	0.500	0.500	6.58	6.00	0.060	0.010 to 0.060
	SFK170BL	0.500	0.500	7.58	7.00	0.060	0.010 to 0.060
	SFK1100BL	0.500	0.500	10.58	10.00	0.060	0.010 to 0.060
	SFK1120BL	0.500	0.500	12.58	12.00	0.060	0.010 to 0.060

8000 Whitepine Road
Richmond, VA 23237

phone: 804-743-0982
fax: 804-743-3413

toll free
phone: 800-787-7325
fax: 800-448-2908




industrial@sealeze.com
www.sealeze.com

Please feel free to contact us for assistance.
804-743-0982 | 800-787-7325
industrial@sealeze.com


Stock Aluminum Brush Holders

STOCK BRUSH GUIDE (INCHES)


IWSBHE.0909




Straight
Flange




Straight Flange
Double Holder




Straight
Flange
Offset



Angled
Flange



Reverse Angle
Flange



Right
Angled
Flange

All measurements in inches.

Fits Brush Section Size	Holder Product Code	X	A	B	C	D
			in.	in.	in.	in.
Straight Flanges						
A	XTA180CLA	180°	0.040	0.446	0.212	0.197
B	XTB280CLA	180°	0.062	0.427	0.264	0.267
B	XTB210CLA	180°	0.062	0.735	0.265	0.262
C	XTC380CLA	180°	0.050	0.439	0.311	0.292
C	XTC381CLA	180°	0.050	0.750	0.311	0.292
C	XTC382CLA	180°	0.050	1.500	0.311	0.292
C	XTC383CLA	180°	0.055	3.000	0.311	0.292
D	XTD480CLA(1)	180°	0.062	0.711	0.391	0.366
D	XTD482CLA	180°	0.062	1.500	0.391	0.366
D	XTD483CLA	180°	0.062	3.000	0.391	0.366
F	XTF580CLA	180°	0.062	1.000	0.474	0.469
F	XTF582CLA	180°	0.062	1.500	0.474	0.469
G	XTG680CLA(2)	180°	0.062	0.784	0.528	0.505
G	XTG682CLA	180°	0.062	1.472	0.528	0.505
G	XTG682FCLA (off-set)	180°	0.062	1.407	0.528	0.880
G	XTG685CLA	180°	0.079	4.894	0.576	0.539
G	XTGG680CLA (double)	180°	0.062	1.250	0.582	0.948
K	XTK1082CLA	180°	0.079	2.001	0.689	0.667
Angled Flanges						
A	XTJ140CLA	40°	0.062	0.750	0.225	0.213
B	XTB215CLA	15°	0.062	0.768	0.265	0.262
B	XTB230CLA	30°	0.062	0.862	0.265	0.262
C	XTC345CLA	45°	0.050	1.250	0.311	0.292
D	XTD445CLA	45°	0.062	0.844	0.391	0.366
D	XTD45XCLA	45°	0.062	1.890	0.391	0.366
D	XTD45RCLA(3)	45°	0.062	1.000	0.391	0.366
F	XTF545CLA	45°	0.062	1.500	0.474	0.469
G	XTG645CLA	45°	0.062	1.000	0.528	0.505
Right-Angled Flanges						
A	XTA190CLA	90°	0.056	0.347	0.204	0.220
B	XTB290CLA	90°	0.055	0.423	0.266	0.264
B	XTB292CLA	90°	0.055	1.250	0.266	0.264
C	XTC390CLA	90°	0.060	0.663	0.303	0.331
D	XTD490CLA	90°	0.062	0.697	0.365	0.391
F	XTF590CLA	90°	0.062	1.000	0.469	0.474
G	XTG690CLA	90°	0.062	0.873	0.505	0.528
K	XTK1092CLA	90°	0.079	1.751	0.667	0.688

8000 Whitepine Road
Richmond, VA 23237

phone: 804-743-0982

fax: 804-743-3413

toll free

phone: 800-787-7325

fax: 800-448-2908



industrial@sealeze.com

www.sealeze.com

- 1 Also available in roll formed stainless steel
- 2 Also available in polypropylene and stainless steel
- 3 Reverse flange

The information provided herein is provided for reference only and subject to change without notice. For more information, please call your Sealeze Sales Representative at 1-800-787-7325 or e-mail: industrial@sealeze.com