


Astragal Brush Seal

WORKSHEET
WSASK.0909

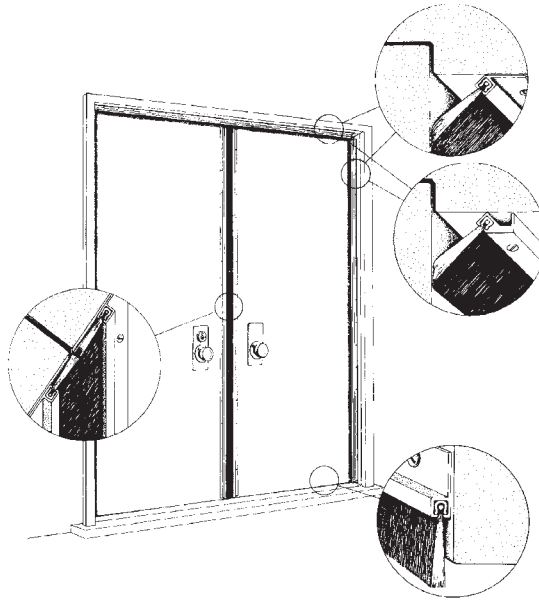

Contact Name: _____

Company Name: _____


Phone: _____

Fax: _____

Email: _____

1. Measure the height of the door along the inside edge (indicate in. or mm): _____
2. Measure the gap between the inside edges of the doors (indicate in. or mm): _____
3. Determine what color or finish you want for the brush holder (gold, silver, dark brown): _____
4. Select the proper astragal seal Product Code based on the color/finish desired, the door height and the gap to be sealed. Indicate the quantity needed: _____

Top View

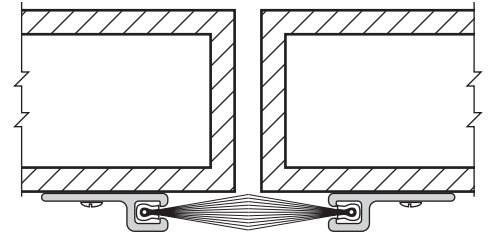

Note: Install astragal brush seals so that when the doors close the brushes just touch. Do not overlap. If door sweeps are installed, astragal brush seals should be installed on the opposite side of the door.

8000 Whitepine Road
Richmond, VA 23237

phone: 804-743-1218
fax: 804-743-3413

toll free
phone: 800-446-7325
fax: 800-448-2908



weatherseal@sealeze.com
www.sealeze.com

ASTRAGAL SEAL KITS

| Product Code | Holder Color | Door Height | | Seals Gaps Up To | |
|---------------|----------------|-------------|-------|------------------|--------|
| | | ft. | m | in. | mm |
| A180CLA04BL14 | clear (silver) | 7.000 | 2.134 | 0.625 | 15.875 |
| A180DUR04BL14 | dark brown | 7.000 | 2.134 | 0.625 | 15.875 |
| A180GLD04BL14 | Brass (gold) | 7.000 | 2.134 | 0.625 | 15.875 |
| C380CLA06BL14 | clear (silver) | 7.000 | 2.134 | 1.000 | 25.400 |
| C380DUR06BL14 | dark brown | 7.000 | 2.134 | 1.000 | 25.400 |
| C380GLD06BL14 | Brass (gold) | 7.000 | 2.134 | 1.000 | 25.400 |
| A180CLA04BL16 | clear (silver) | 8.000 | 2.438 | 0.625 | 15.875 |
| A180DUR04BL16 | dark brown | 8.000 | 2.438 | 0.625 | 15.875 |
| A180GLD04BL16 | Brass (gold) | 8.000 | 2.438 | 0.625 | 15.875 |
| C380CLA06BL16 | clear (silver) | 8.000 | 2.438 | 1.000 | 25.400 |
| C380DUR06BL16 | dark brown | 8.000 | 2.438 | 1.000 | 25.400 |
| C380GLD06BL16 | Brass (gold) | 8.000 | 2.438 | 1.000 | 25.400 |



Sealeze Nylon Therm-L-Brush®
up to 4 in. long are UL labeled
for use on 3-hour fire doors.

Refer to the appropriate Sealeze Worksheet for Door Jambs.